

OPERATING INSTRUCTIONS

FILLING WITH SALT

The cabinet must be at least a quarter full of salt to work correctly. For best results use salt tablets and fill the cabinet to within two inches of the top. Alternatively granular salt may be used but in this case only fill the cabinet up to half way. Filling will be required every 14 to 28 days.

BY-PASS

It is possible to isolate the water softener using the bypass manifold. The valve is shown in the normal soft water position. To by-pass the softener push the plunger as shown on the label.


HOLIDAYS

You may wish to switch the water softener off. To do this turn off the water and power supply. On your return turn on and start a manual regeneration (see fascia panel).

Contact us on 01440 761500 www.atlantis-uk.com info@atlantis-uk.com



Bypass Manifold

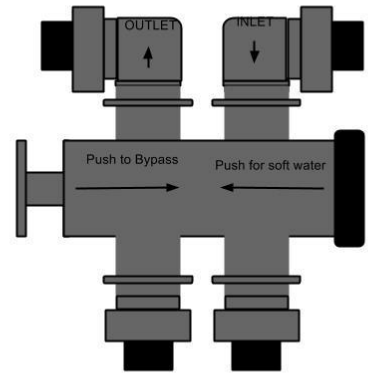

Shown in soft water position